


Removal Instructions

Tacoma Overhead Display

1. Open the sunglasses compartment and remove the phillips head screw inside.
2. Pull down on the front side of the overhead unit. There are 2 friction clips that hold this in. They will release as you pull downward.



3. Disconnect the 2 wiring harnesses.
4. Remove the three T10 Torx screws that hold the compass/temp unit from the overhead panel.

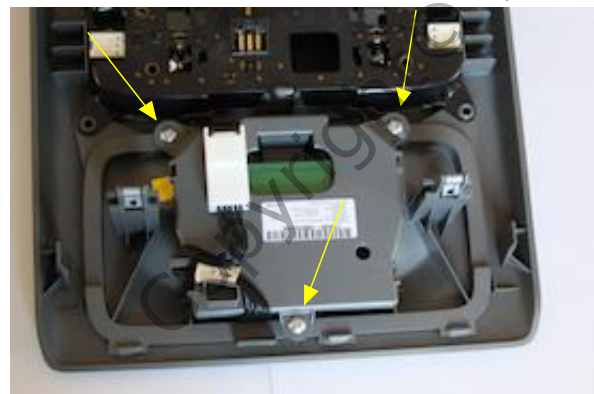

Disclaimer of Liability: These instructions are provided free of charge as reference only to assist in the removal of your instrument cluster. No warranty or guarantee is provided for these instructions, and Circuit Board Medics LLC cannot vouch for completeness or accuracy. Use of the instructions is conducted at the user's risk. Circuit Board Medics LLC is not liable for and hereby excludes any and all indirect, incidental, special, or consequential damages related to the use of information contained in this instructional guide. If you have information that can be modified, added, or deleted to these instructions to help with completeness or accuracy, we welcome your feedback.